

**TECHNICAL DATA SHEET**    *Date of issue 22.06.2017*

## PAINT REMOVER

- Article number:** 26730
- Intended use:** Car refinishing Product/ Paint remover
- Area of application:** Ideal for the cleaning of old paints on many substrates.
- General information:** Highly effective paint remover. Removes old coats of paint on stone, concrete, brickwork, tarmac, metal and wood. Gel structure adheres also on vertical surfaces.
- Quality and properties:**
- Highly effective spray for the removing of old paintings
  - Gel structure
  - Thorough and quick
  - Economical proportioning
  - Easy to use
  - For wood, glass, brickwork, clinker, stone, concrete, asphalt and metal
- Physical and chemical data:**
- **Colour:** white/transparent
  - **Smell:** solvent
  - **Efficiency:** very good
  - **Substrate:** wood, glass, brickwork, clinker, stone, concrete, tarmac, metal
  - **Storage:** 10 years if appropriate storage provided
  - **Size:** Aerosol cans, maximum nominal volume 400 ml
  - **VOC-value:** 224,3 g
  - **Relative density at 20°C:** 1,25 g/ml
  - **Yield:** 1,5 g/sec
  - **Vapour pressure at 20°C:** 3 - 4 bar
  - **Coverage:** approx. 0,8 m<sup>2</sup>

### Using instructions:


Before use, carefully read and observe the warning texts on the label!

### Instructions:

- Bring can to room temperature.
- Operating temperature 5° to 30° C.
- Shake for 2 minutes before use.
- Before use, test the compatibility of the surface.
- Apply Paint Remover generously and allow to take effect.
- Residence time approx. 15 min (depends on the quality and the age of the removing paint).
- Then remove with an appropriate tool. When required, repeat the treatment.
- Contaminated Paint Remover should be regarded as chemical waste

### For professional use only

### Wear an appropriate respirator (A2/P3 recommended)

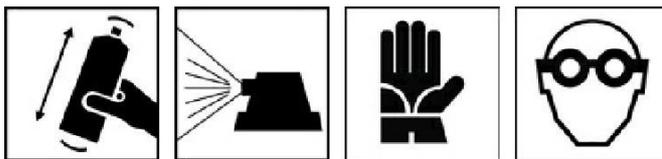

2 min

### Environment and labelling:

#### Environmentally sound:

The product is 100% free of heavy metals.

The caps and packagings are made of recyclable material.

#### Disposal:

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

#### Marking/Labelling:

Product complies with the actual labelling regulations according to Preparation Guideline 1999/45/EG. Aerosol corresponds to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

This release replaces all eventually earlier issued versions.

For additional information, not contained in this Technical Data Sheet, please contact the supplier via:  
info@chamaeleon-produktion.de

For safety information, please refer to the corresponding Safety Data Sheet.